


Outdoor Monitor

4908XAFP

Display diagonal	48.5 Inches (1232.00mm)
Resolution	1920x1080 px @ 60 Hz
Orientation	Landscape & Portrait
Panel Type	a-si TFT LCD
Brightness	2500 cd/m2
BLU Adjustment	Auto (Ambient Light Sensor)
Contrast	1.300:1
Viewing Angle	178°

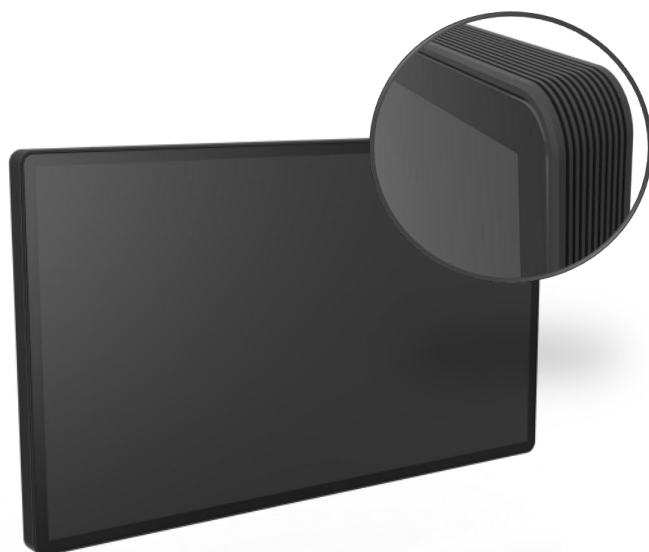

Colors	10-bit, 1.07B colors
Color Gamut	NTSC 72% (sRGB>100%)
Surface Treatment	Dual AR coating (Transmittance>97%) on Tempered Glass
Operation Time	24 / 7
IP Rating	IP66
Operating Conditions	Temperature -20°C to 60°C Humidity 10-90%

Delivered Contents	Power Cord, Power Supply, Remote Control, Mini HDMI Cable
---------------------------	---

Integrated Computer	OS	Android 6.0
	CPU	RK3288 Quad-Core Cortex-A17 Quad-Core @ 1.8GHz
	GPU	Mali-T764
	RAM/ROM	2GB (DDR3) / 8GB (EMMC)
	WIFI / BT	WIFI 802.11 b/g/n / Bluetooth 4.0
	ETHERNET	RJ45 100M/1000M
	VIDEO	MP4 (H.263, H.264, H.265, MPEG4, VC-1, MP43, WMV7, WMV8) 1920x1920px @ 29.97fps
	PHOTO	JPEG, BMP, PNG, GIF

Connections	1x Mini HDMI 2.0, 1x micro SD-Card, 1x uUSB OTG
--------------------	---

Networking	WiFi 802.11 a/b/g/n / Bluetooth 4.0
-------------------	-------------------------------------

Features	Polarized Sunglass free Auto Brightness Control Ambient Light Sensor Temperature Sensor Auto Source Switching Recovery
-----------------	---

Outdoor Monitor

Dimensions	1137.8 x 668 x 46 mm / Bezel Width 32mm (even)
VESA	400x300 mm, M8, 17mm
Weight	35 Kg
Package Unit	5 Screens / Pallet
Power Consumption	Operation 210W / 0.5W Sleep Mode (AC 100V-240V, 50/60Hz)
Certifications	CE
Warranty	2 Years Parts & Labor